

Döllken Product Information

SLK 50

The skirting with cable duct and flexible lip seals



- **With large cable duct**
- **Easy concealed fixing**
- **Visually perfect surfaces**
- **Many decorative finishes**
- **Pleasantly flexible to work with**
- **100% moisture-resistant**
- **Matching accessories**

Profiles for Professionals

DÖLLKEN

W E I M A R

A SURTECO COMPANY

A convincing number of plus points!

Döllken SLK 50

Installation Simply remove cover profile, fix with screws or nails and close cover profile.



Moisture resistance 100%



Flexibility Good, adapts to wall unevenness



Shades Decorative finishes match currently available laminated floors



Price Optimal value for money



Specification

The cable channel skirting consists of elastic hard-wearing vinyl and has flexible lipseals to wall and flooring for sealing of unevennesses.

Height: approx. 50 mm
 Edge overlap: approx. 25 mm
 Colour:
 Product: Döllken SKL 50
 Installation: Professional installation in accordance with the manufacturer's instructions. Corners with corner clips, ends with clip-on caps.
 Fixating: - with zinc nails
 - with screws


The chosen fastening system depends on the soundness of the wall structure, which should be checked for appropriate quality and rigidity by the fitter. The skirting should be installed tension free. Positive tolerances are to be avoided.

Maximum spacing: 25 cm, at corners max. 4 cm from the corner. Use matching clip-on elements for internal and external corners. Ends are sealed with matching end caps.

Your Döllken Distributor

Dimensions and accessories

SLK 50: 1 Sales unit = 40 x 2,50 m

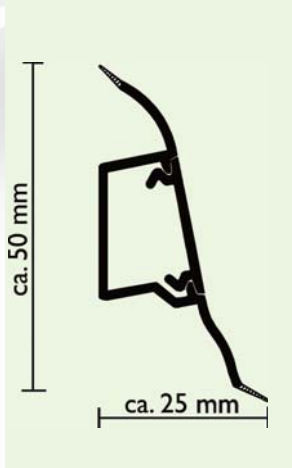

Accessories:
 External corners (printed)
 Internal corners (printed)
 End caps, right and left (printed)
 Connectors (printed)



Shades and colours

